


EAZY Ceil



As easy as ABC.....


similar to fibrous plaster or gypsum ceiling installation method

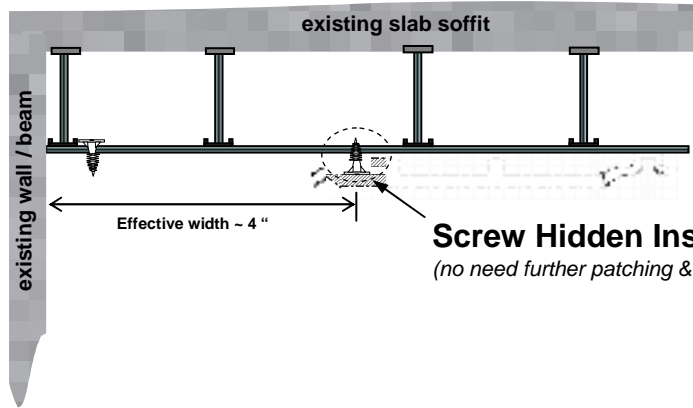

3-step Installation Method,
Screw → Clip-in → Screw Again & repeat...

8 mm or 12 mm
(overall thickness)

Screw Hidden Inside
(no need further patching & painting)

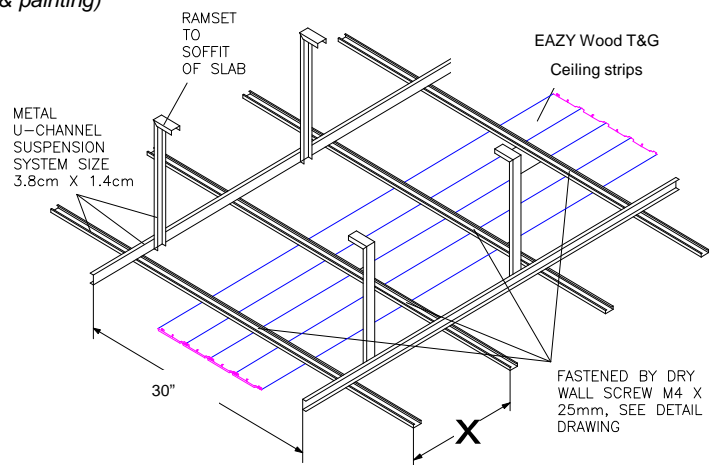

X = 18" (for 12 mm thk. Panel), X = 10" (for 8 mm thk. Ceiling Strip)

Remarks ;

- all specifications suggested in this catalog are based on use under normal condition only, kindly counter check with the supplier / manufacturer for use under special condition

"Butt-joint" (without patching / painting)



Fixing Of Border (Tools)

Recommended Methods:

By air-compressed pinner gun (i-nails) with applying industrial / pvc glue.

EAZYWood EAZYWood EAZYWood EAZYWood EAZYWood EAZYWood EAZYWood



Site Preparation

1. To ensure all related / conjunction services , i.e. plumbing, electrical, air-cond e.t.c works done before proceed.
2. Upon obtain confirmation, materials will be on-site within 3 working days.
3. A proper / secure / sheltered storage place to be ready for temporary storage / working place.
4. To ensure safe (checked and approved by competent person in charge) access, i.e. scaffoldings (if required) ready in place (by main-con / others) before any works.

Installation Method / Specifications

1. Vertical support framing
 - i) Material = furling channel & screws
 - ii) Down hanged, either from existing soffit of concrete slab or other permanent structure, which able to with-stand 0.41 kg / square feet.

2. Horizontal support framing (Primary & Secondary beam)

Primary beams

- i) Material = furling channel & screws
- ii) Fixed / screw tightened to vertical support framing @ 30" C/C.

Secondary beams

- i) Material = furling channel & screws
- ii) Fixed / screw tightened to "primary beams"
 - @ 10" C/C (for 8 mm thk ceiling strips)
 - @ 18" C/C (for 12 mm thk ceiling strips)



3. Install EAZY Wood Ceiling Strip

- Material = EAZY Wood Ceiling Strips (measured & cut to sizes) & screws
 - Start from one end, fixed / screw tightened first ceiling strip to “secondary beams”. Screws tightened @ 10” C/C.
- iii) Clip-in the second piece of ceiling strip from perpendicular direction (to first installed ceiling strip)
- iv) fixed / screw tightened second ceiling strip to “secondary beams”. Screws tightened @ 10” C/C.
- iv) Continue with 3rd, 4th.....followings ceiling strips until the other end of the ceiling.

** in the cases that required to join between ceiling strips, it will be a “butt-joint” without any further patching or painting.*

4. Installation of Border / Lining

- i) Material = EAZY Wood Border (measured & cut to sizes)
- ii) Fixed / Air-Compressed nail the border pieces on the installed ceiling strip area.

** if required, a min. amount of industry silicon adhesive would be used to “paste” the border on the ceiling area (only application to ceiling area, which exposed to heat temperature < 40 degree Celsius)*