

# EAZYWOOD WPC DECKING

(quality improved Double-Layered Technology)

## Typical Components of EAZYWOOD WPC Decking System

Component	Detailed dimensions (mm)	Remarks / Basic Installation Guide
WPC Deck board	125/140(w) X 25 (thk.) X 3,050 (L)	Installed with expansion gaps (5- 10 mm)
HDPE-WPC Solid Batten	40 (w) X 25 (thk.) X 3,050 (L)	Running @ 250 mm c/c (max.). Other optional batten's material, i.e. grade A hard wood, gal. steel, aluminium, s/steel e.t.c.
Edging board	95 (w) X 10 (thk.) X 3,050 (L) or 90 (w) X 10 (thk.) X 3,050 (L)	Installed with "direct screwed" on @ every 300 mm (max) plus bonding silicon adhesive (external use type).
WPC L-angle	25 X 25 X 3,050 (L)	Installed with "direct screwed" on @ every 300 mm (max) plus bonding silicon adhesive (external use type).



## DOUBLE-LAYERED TECHNOLOGY

(with premium quality material for outer layer)


- MORE natural looked with random grain / tone
- MORE resistance to UV attack
- MORE resistance to fungus & algae growing
- MORE resistance scratches (renew-able by very fine sanding)

## tested / certified



custom made services on special colours & lengths are available! \*\*

## Premium Selection (deck board colour)

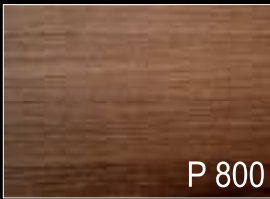

## more surface finishes



# EAZYWOOD WPC DECKING

towards natural timber look with the DOUBLE-LAYERED TECHNOLOGY



## Contact us

EASY WOOD SDN. BHD.  
 Selangor - No. 4, Jalan BP 5/8, Bandar Bukit Puchong, 47100 Puchong, Selangor. Tel : +603 8060 0392 / 0352 Fax : +603 8060 0243  
 EASY WOOD (PENANG) SDN. BHD.  
 Penang - No. 31, Lorong Perda Timur 2, Bandar Perda, 14000 Bukit Mertajam, Sebarang Prai Tengah, Penang. Tel : +604 530 3052 Fax : +604 530 3061  
 Email : [info@easywood.com.my](mailto:info@easywood.com.my) Web site : [www.easywood.com.my](http://www.easywood.com.my)



# Ceiling strip & Wall paneling (with random wood-grained technology)


→ more natural look with no repeated wood-grain patterns

- **For External** - most suitable for steel roof truss & shingle roof tile system
- **For Internal** – mixed & matched with plaster ceiling as exclusive designs
- **Cost savings** @ initial & long-term due to,
  - ✓ simple installation method (similar to plaster ceiling) → cheaper & faster than conventional carpentry method
  - ✓ effective ceiling width 4", easier material calculations → minimum wastages
  - ✓ pre-finished surface with smart T&G design (screws hidden) → needs no further patching, painting nor varnishing.
  - ✓ termite & water resistant, **no termite / insect treatment required (long term savings!)**

## Best Recommended For roof eave / over hang ceiling



similar to fibrous plaster or gypsum ceiling installation method

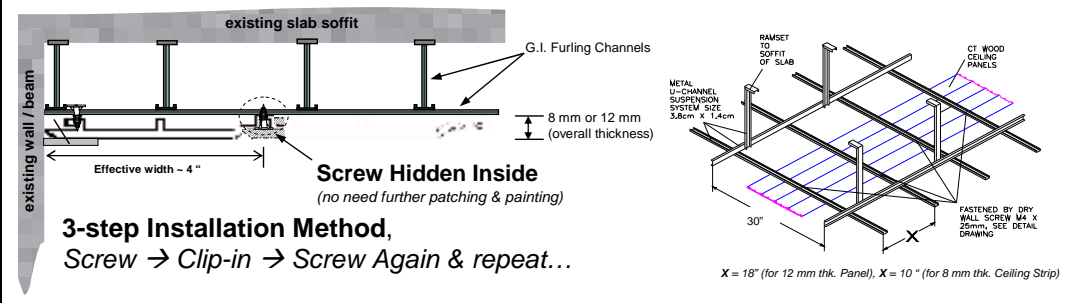

## 4" T&G Ceiling Strip & Wall Paneling



"EAZY-CEIL 8121"  
8 thk. x 121 x 3050 mm  
(T&G with ~4mm groove width)

"EAZY-CEIL 12121"  
12 thk. x 121 x 3050 mm  
(T&G with ~7mm groove width)

"EAZY-CEIL 12123"  
12 thk. x 123 x 3050 mm  
(T&G without groove)

## Homogeneous Series (for ceiling, border & skirting)



## Rustic Series (applicable to EAZY-CEIL 12121 & 12123 only)



**Remarks ;**  
- all specifications suggested in this catalog are based on uses under normal condition only, kindly counter check with the supplier / manufacturer for use under special conditions.  
- actual product colours may vary from images shown in this catalog due to printing effect. Kindly refer to samples given.

**Skirting 1870** termite & water resistant easy maintenance bend-able without cracks